


1. Align and assemble valve extension and hub
2. Secure the set screw
3. Place spring retainer
4. Turn all the way to the RIGHT to turn it off
5. Assemble the knob and the label insert
6. Place the knob in correct position.

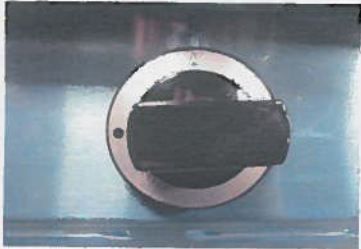

**OFF position could be either way**